XS58Z5A


Truck-mounted Concrete Boom Pump




Main Features

- Assembly on standard 4 axles chassis
- 6 sections placing boom, “RZ” folding system, FEM designed
- Front 2 levels X outrigger and swing-out rear outriggers
- Hydraulic cylinder of legs is installed in the box structure, with good stress state
- MPS (Micro Pressure Shock) reversing buffering technology
- Rock valve
- Large diameter slide valve with casting oil passage
- Intelligent electrical control system
- Remote / Manual control method for boom and pumping unit
- Centralized lubrication system for pumping unit
- Piston automatic return technology, easy to replace piston
- Main hydraulic pump overload protection technology
- Engine overload protection technology
- Engine low-speed protection technology
- Anti-tipping safety protection technology
- Automatic mixing switchover technology

Operation Range

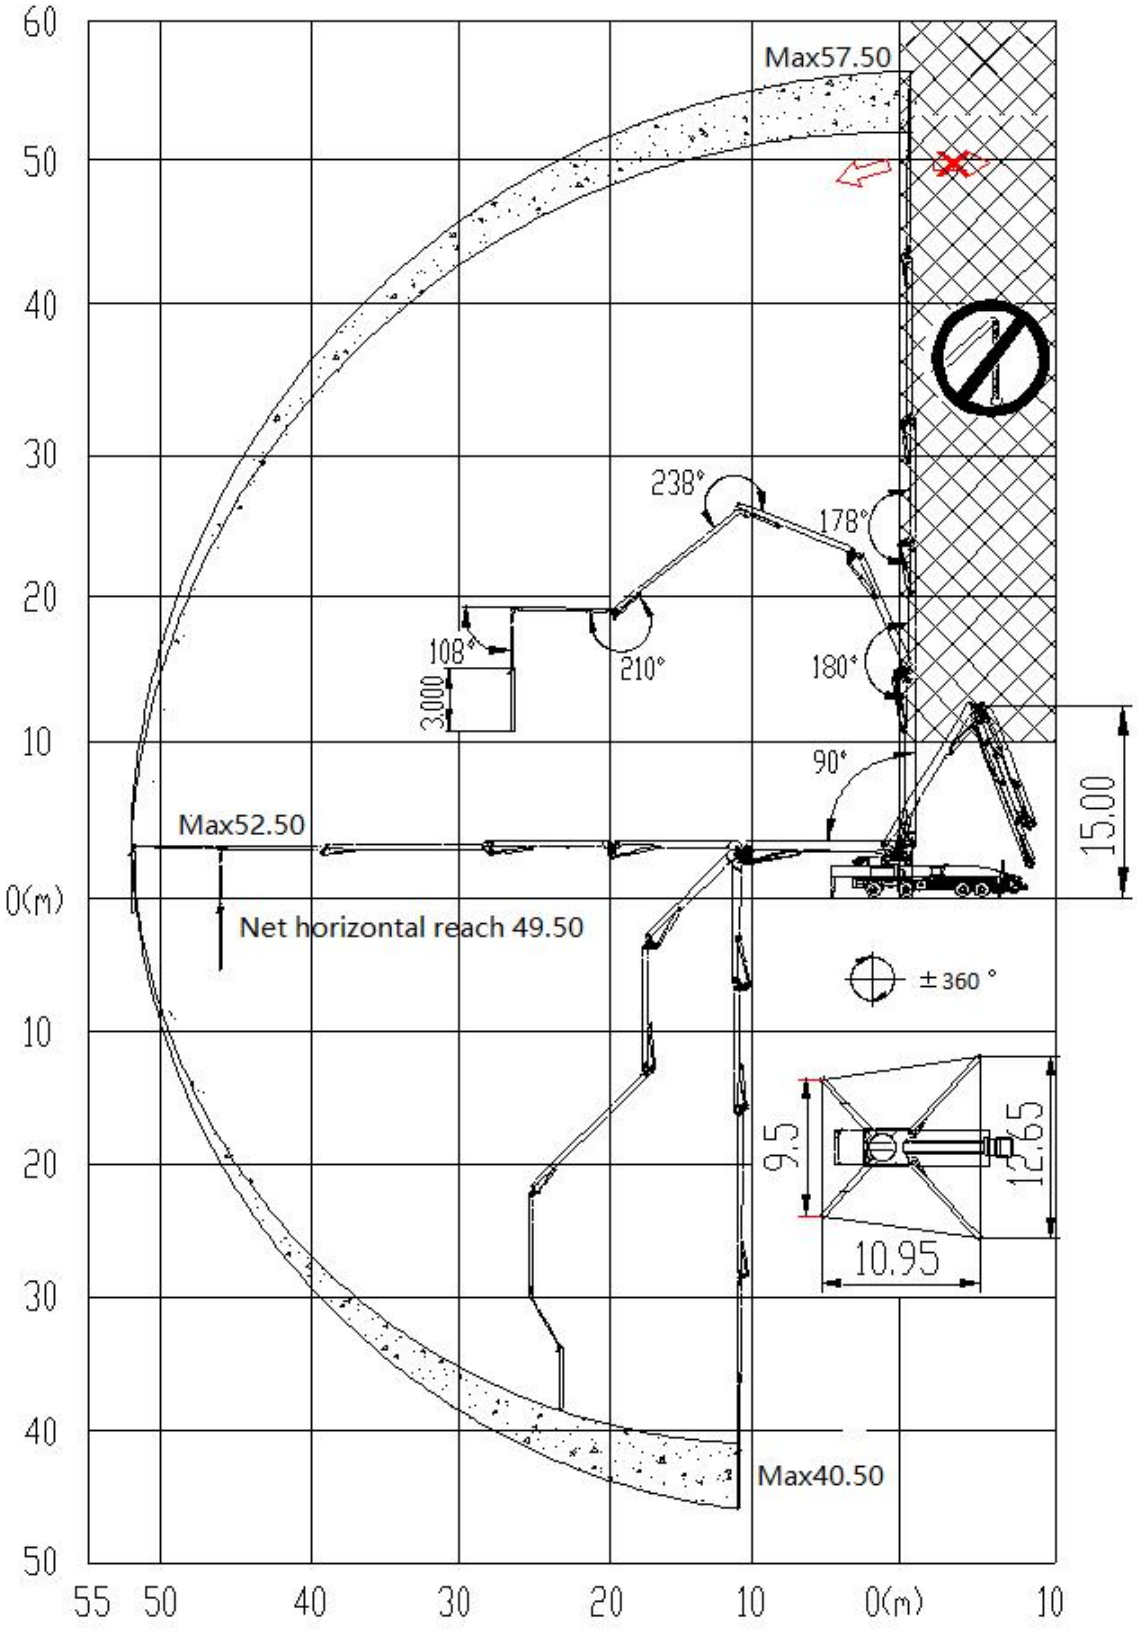

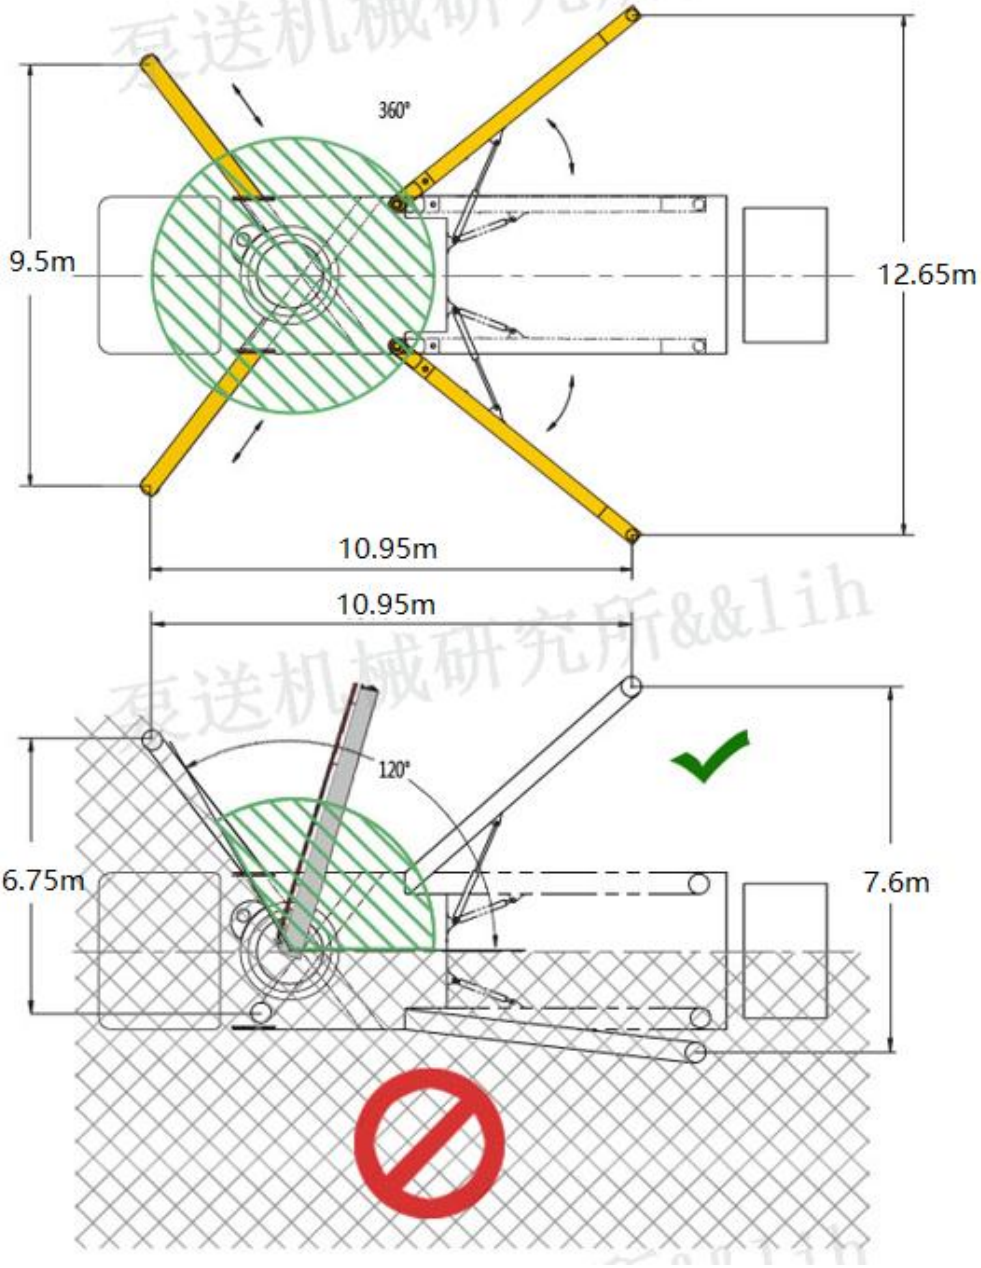
360°
9.5m
12.65m
10.95m
10.95m
120°
6.75m
7.6m

Main technical parameters

1. Pumping unit technical data

Items		Parameters
Theoretical output	m^3/h	170
Delivery pressure	MPa	10.2
Maximum aggregate diameter	mm	≤40
Concrete cylinder(diameter×stroke)	mm	Φ260×2000
Filling height	mm	1580
Hopper capacity	L	650
Hydraulic circuit		OPEN
Transfer tube		Rock valve
Maximum tube swing time per min		25~27

2. Placing boom technical data

Items			Parameters
Max. vertical reach		m	57.5
Max. horizontal distance (from center of slewing axis)		m	52.5
Reach depth		m	40.5
Pipeline diameter		mm	125
Section numbers			6
1st section unfolding angle			90°
2nd section unfolding angle			180°
3rd section unfolding angle			178°
4th section unfolding angle			238°
5th section unfolding angle			210°
6th section unfolding angle			108°
Rotating angle of the placing boom			±360°
Stabilizer span	Longitudinal span	mm	10950
	Front stabilizer transverse span	mm	9500

	Rear stabilizer transverse span	mm	12650

3. Technical data for travel

Chassis brand	**SINOTRUK**
Chassis model	SITRAK ZZ5446V456ME1
Overall dimensions (L×W×H)	14570×2550×4000
Overall weight	43870kg
Axle numbers	4
Wheelbase mm	1950+4500+1400
Tire	385/65 R22.5（20PR），315/80 R22.5（18PR）
Engine Model	MC11.44-50
Max. Power	440HP
Displacement of Engine	10.518L
Emission standard	Euro V / Euro Ⅲ

Technical data and characteristics subject to modifications without notice

我公司有权在不通知的情况下变更配置和参数

XUZHOU XCMG SCHWING MACHINERY CO., LTD
No.29 Taoshan Rd, Xuzhou, Jiangsu, China
Tel: +86 516 83111590
Fax: +86 516 87892035
www.xcmg.com
© by XCMG | All rights reserved